



Innovators of Freight Securement Systems®

# LogiRatchet Strap™

The reusable ratchet strap compatible with all Logistick, Inc. strapping anchors. Designed for efficiency and ease.

## Installation Guide



The complete Installation Guide for the Logistick LogiRatchet Strap™.

For best results, please read through all instructions prior to installation.


## Materials Needed

- LogiRatchet Strap™
- Logistick Strapping Anchors\*
- Dry Cloth
- Magnet/Tape (optional)
- Scraper (optional)
- Rubbing alcohol (optional)
- Corner Protectors (optional)


*\*note: strapping anchors sold separately*

### 1. Choosing the Application Area

Before or while loading the freight, determine the best location for installation. Keep in mind that multiple strapping system sets may be needed to safely secure your cargo. The strapping anchors are designed to adhere to the container wall and should be placed an equal distance from the floor and **at least 6 feet, or about 2 pallet rows, BEFORE the end of the load** (figure 1). The void between the freight and the container wall needs to be 3 inches or less (figure 2). This placement is critical because it helps maximize the shear strength of the strapping system.

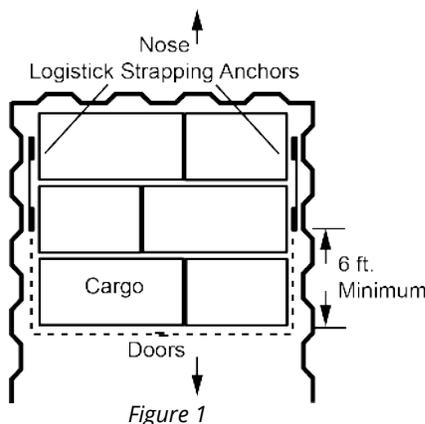

### Strap Placement

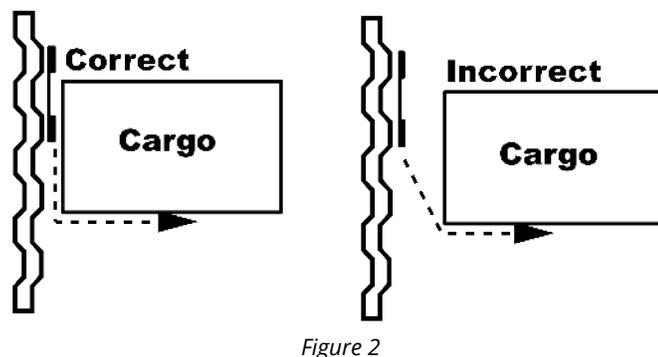

### 2. Prepping the Application Area

The entire application area must be clean and dry to ensure proper adhesion. Use a dry cloth, and if needed, a scraper and rubbing alcohol to remove loose dirt, dust, condensation or frost from the application area.



### 3. Adhering Your Strapping Anchors

The Strapping Anchors need to be positioned so the entire adhesive surface will make direct contact with the container wall. The handles, which are the anchor points, must be directed **towards the container door**.

To install the first strapping anchor, remove the adhesive backing and place your strapping system on the wall and **at least 6 feet before the end of the load**.



Press firmly against the piece to assure that the tape bonds to the wall. Repeat this procedure with the second piece on the opposite wall, making sure that it is positioned at the same height, and at least 6 feet before the end of the load.



**IMPORTANT: Once the strapping anchors are installed, they cannot be repositioned.**

### 4. Attaching The LogiRatchet Strap™

Attach one hook, facing inward, to the handle of your strapping anchor. Pull toward the handle end to lock the hook in place. When oriented correctly, the safety tag on the strap should be facing the trailer wall. Repeat the process on the other side.

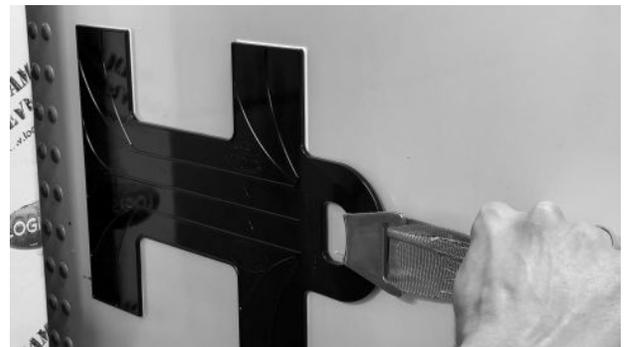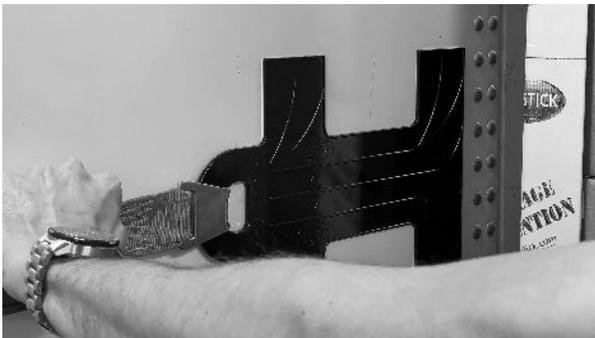

### 5. Temporarily Secure Banding

Using tape or a magnet, temporarily secure the loose strap to the container wall so it will be out of the way and accessible after the freight is loaded. Repeat the process on the other side, securing the ratchet to trailer wall utilizing the integrated magnet.



## 6. Securing the Freight

Once the remaining freight has been loaded, insert the loose end of the strap into the mandrel of the ratchet. Pull the strap through the slot in the mandrel, pull the slack out of the strap to make it tight, and crank the ratchet to desired tension. Make sure the straps stay aligned to avoid tangling/locking, then lock the handle down after tensioning.

*\*note: multiple strapping systems may be needed to properly secure your freight.*

Step 1: pull strap through the slot in the mandrel.



Step 2: pull slack out of the strap to make it tight.



Step 3: crank the ratchet to desired tension.



Step 4: lock the handle down after tensioning



If you have any questions about this product or any of our other products please email us at [sales@logistick.com](mailto:sales@logistick.com) or scan the QR code below to access our installation videos and tips.

**Thank you for your business and  
continued partnership.**



Scan for full video!

**Logistick.com**



*Innovators of Freight Securement Systems®*

Revised February 2025  
L.21



Innovators of Freight Securement Systems®

# LogiRatchet Strap™

The reusable ratchet strap compatible with all Logistick, Inc. strapping anchors. Designed for efficiency and ease.

## Removal Guide




The complete removal guide for the Logistick LogiRatchet Strap™

### Note:

Remove the strapping anchors from the container walls in accordance with Logistick instructions. For additional assistance contact [sales@Logistick.com](mailto:sales@Logistick.com) or visit [Logistick.com](http://Logistick.com) for more information

### 1. Removal of the LogiRatchet Strap™

**CAUTION:** Before loosening the strap: make sure the load has not shifted and that the tension on the strap can be released safely. Unsecure the load by pulling the release to the fully open position of the LogiRatchet Strap™ and pull out the strapping from the mandrel.

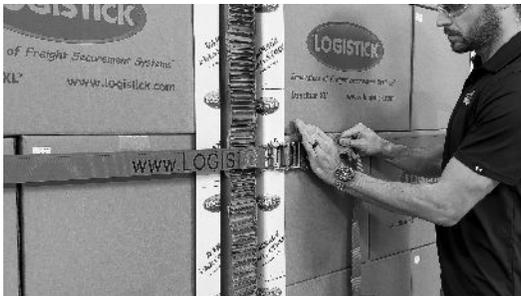

Make sure to unlock the ratchet all the way to ensure it is fully open.



### 2. Temporarily Secure Banding

Using tape or a magnet, temporarily secure the loose strap to the trailer wall and the ratchet to the wall utilizing the integrated magnet. Unload your freight and remove the hooks from the Strapping System, coil the strapping, and use a rubber band or tie to prevent unraveling.



Scan for full video!



Innovators of Freight Securement Systems®